
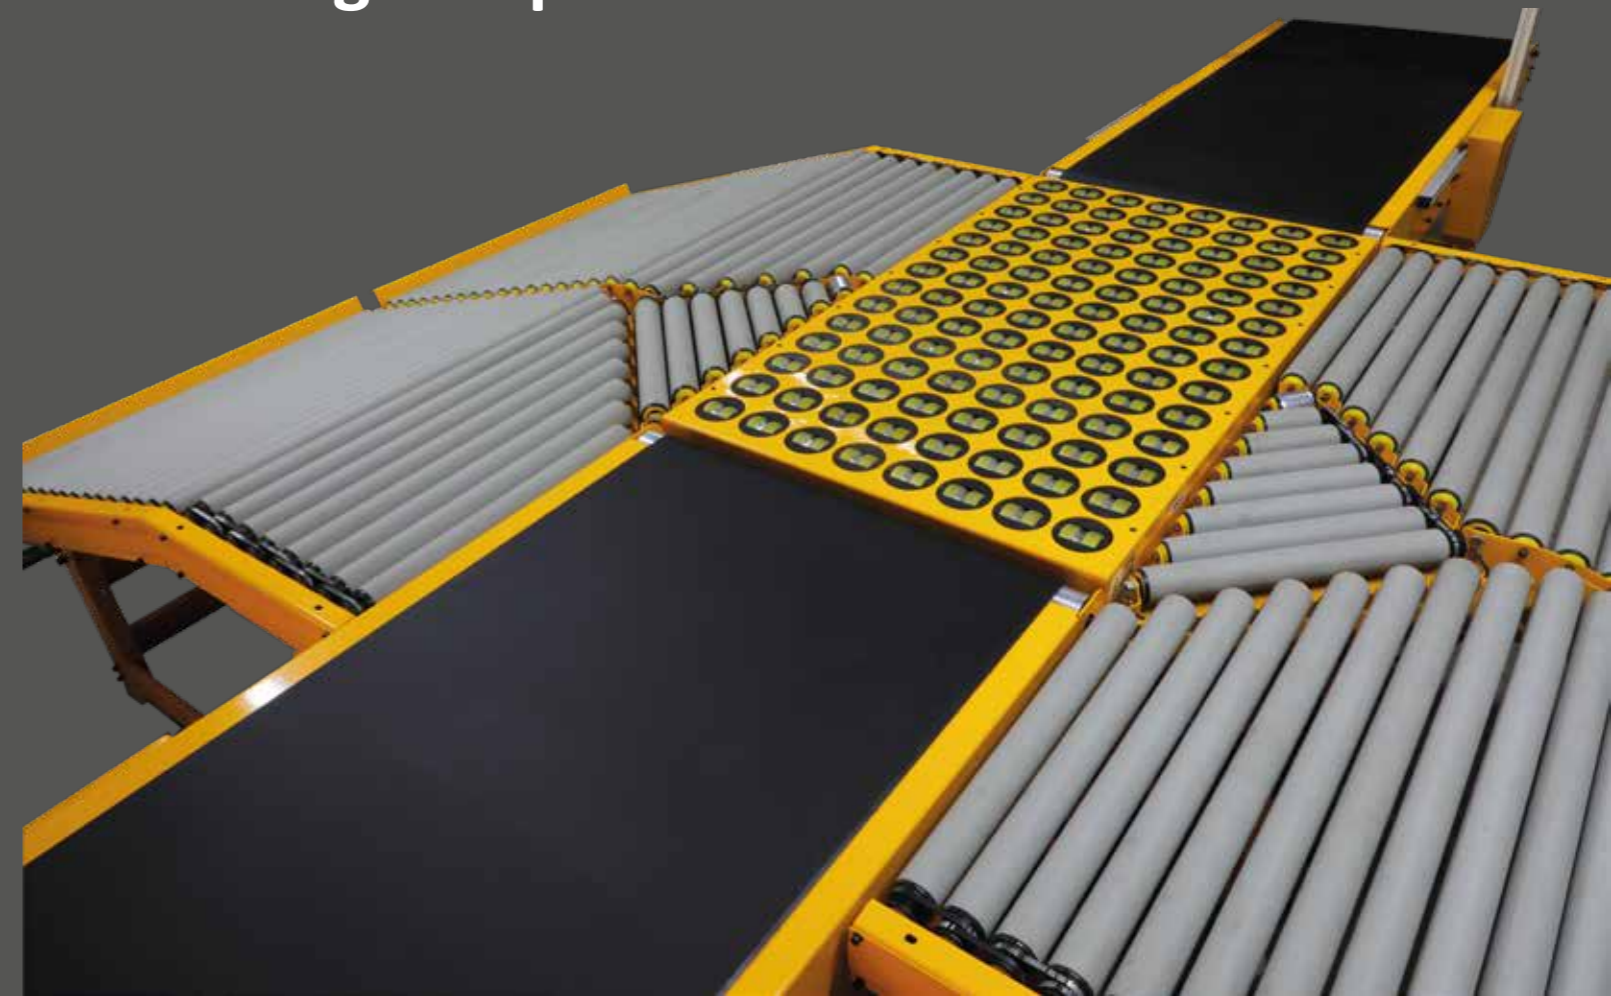


Intralogistics

## High-Speed Wheel Sorter

30° - 45° - 90° Diverts  
For High – Speed wheel sorter

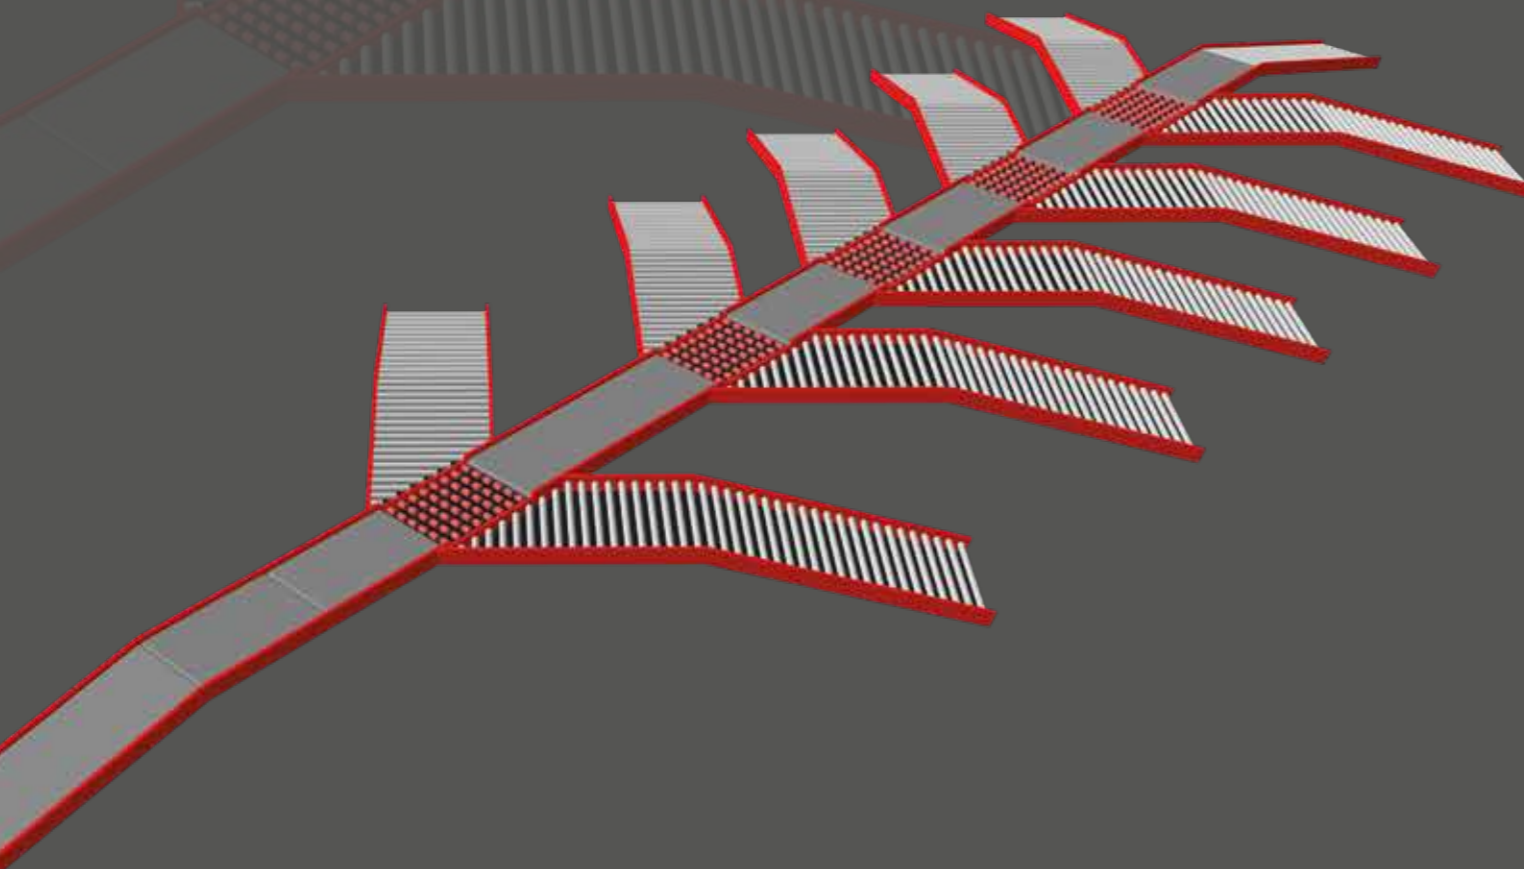

**Öncü Konveyör ve Otomasyon Makina San.Dış.Tic.Ltd.Şti.**

Telephone : +90 (212) 549 27 47  
+90 (212) 549 27 65  
Web : www.oncukonveyor.com

Mail : sales@oncukonveyor.com  
info@oncukonveyor.com  
oncu@oncukonveyor.com

Address : İ. O. S. B. Metal İş San.Sit.  
4. Blok No: 16-18  
Başakşehir/İstanbul



The Wheel sorter offers smooth diverts and high throughputs , for a large range of application

With right and left configurable exist , it can sort products at 30°,45° or 90° and up to 8000 product /hour


Sorter doesn't use any pneumatic system to operate , offering easy and cost -efficient integration and maintenance

## Technical Detail

### Technical Features



|                       |                   |
|-----------------------|-------------------|
| Capacity              | 8,000 pph         |
| Divert angle          | 30° - 45° - 90°   |
| Item size min. (mm)   | 100 x 100 x 10    |
| Item size max. (mm)   | 1200 x 1000 x 800 |
| Item weight max. (kg) | 40                |

*\* This information is subject to change. Please contact us for customized specification and configuration*



### Multi Angle Sortation

All in one diverter, for left and right sorting at 30°,45°or 90°

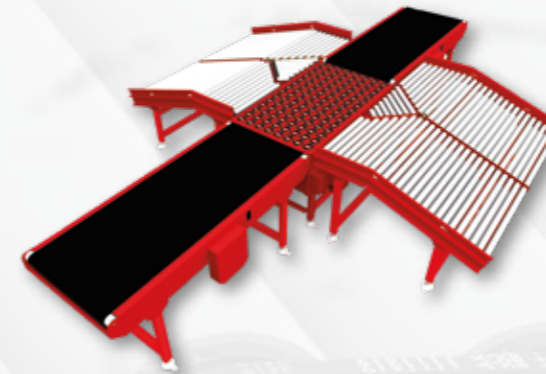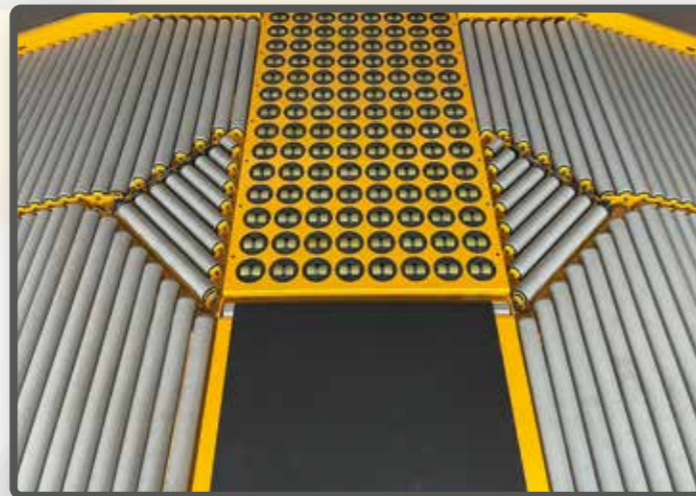


**We**  
Design  
Simulate  
Produce



### High Efficiency

Up to 8000 transfers / hour for a single zone  
Non-stop transfer sequence. Driving wheels predict the direction of the next parcel for a continuous flow of transfer  
Prevent bottlenecks at the heaviest traffic points on the line  
Avoid bottlenecks at the busiest traffic points on the line

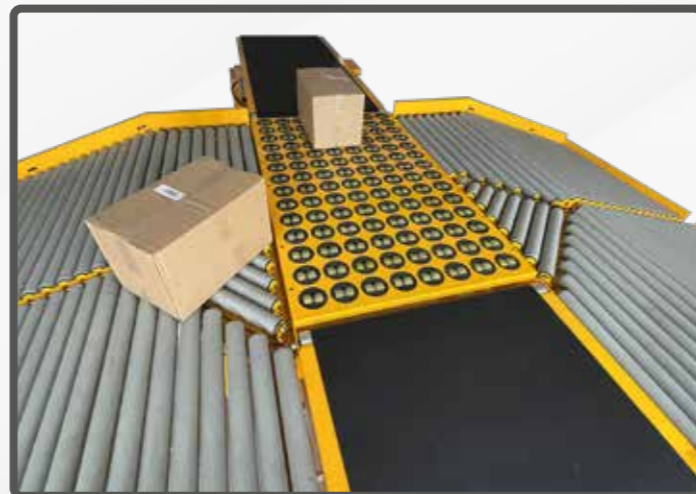

### Applications

